

Likelihood Analysis for Mega-Pixel Maps

A. Kogut^{1,2}Accepted for publication by
The Astrophysical Journal Letters

ABSTRACT

The derivation of cosmological parameters from astrophysical data sets routinely involves operations counts which scale as $O(N^3)$ where N is the number of data points. Currently planned missions, including MAP and Planck, will generate sky maps with $N_d = 10^6$ or more pixels. Simple “brute force” analysis, applied to such mega-pixel data, would require years of computing even on the fastest computers. We describe an algorithm which allows estimation of the likelihood function in the direct pixel basis. The algorithm uses a conjugate gradient approach to evaluate χ^2 and a geometric approximation to evaluate the determinant. Monte Carlo simulations provide a correction to the determinant, yielding an unbiased estimate of the likelihood surface in an arbitrary region surrounding the likelihood peak. The algorithm requires $O(N_d^{3/2})$ operations and $O(N_d)$ storage for each likelihood evaluation, and allows for significant parallel computation.

Subject headings: methods: data analysis – cosmic microwave background

¹ Laboratory for Astronomy and Solar Physics, Code 685, NASA/GSFC, Greenbelt MD 20771.

² E-mail: Alan.Kogut@gsfc.nasa.gov.

1 Introduction

Recent advances in instrumentation have transformed observational cosmology from a field starved for data to one where data management is fast becoming a limiting factor. Prior to 1992, for example, there were *no* detections of anisotropy in the cosmic microwave background (CMB). The Cosmic Background Explorer opened the floodgates with maps containing 10^4 pixels, while scheduled missions such as MAP and Planck plan for 10^6 or more pixels. While highly desirable from a scientific standpoint, the explosive growth of cosmological data sets carries the risk that their sheer size will hamper analysis through computational limits on existing or planned computers.

Maximum likelihood methods are commonly used for parameter estimation with maps of the cosmic microwave background. For a multivariate Gaussian distribution, the probability of obtaining N_d data points Δ_i given a set of model parameters p is

$$\mathcal{L} = P(\Delta|p) = (2\pi)^{-N_d/2} \frac{\exp(-\frac{1}{2}\chi^2)}{|\mathbf{M}|^{1/2}} \quad (1)$$

where

$$\chi^2 = \sum_{i=1}^{N_d} \sum_{j=1}^{N_d} \Delta_i (\mathbf{M}^{-1})_{ij} \Delta_j, \quad (2)$$

is a goodness-of-fit statistic and $\mathbf{M}_{ij}$ is the $N_d \times N_d$ covariance matrix. The “best” choice of parameters p_0 is that which maximizes the likelihood function $\mathcal{L}$. The curvature of the likelihood surface about the maximum defines the uncertainty in the fitted parameters,

$$\delta p_j \geq \sqrt{(\mathbf{F}^{-1})_{jj}} \quad (3)$$

where

$$\mathbf{F}_{ij} = \left\langle \frac{\partial^2 L}{\partial p_i \partial p_j} \right\rangle \quad (4)$$

is the Fisher information matrix and $L = -\log(\mathcal{L})$ (see Bunn & Sugiyama 1995; Vogeley & Szalay 1996; Tegmark et al. 1997; Bond et al. 1998).

The maximum likelihood estimator is unbiased and asymptotically approaches the equality in Eq. 3. However, these advantages come at a steep price: computation of both χ^2 and the determinant $|\mathbf{M}|$ in Eq. 1 scale as $O(N_d^3)$ operations, making brute-force calculation computationally infeasible. For large data sets ($N_d > 10^6$) the time required is measured in years, even on the most powerful computers.

Conjugate gradient techniques provide half of the solution. We may reduce the operations count of the χ^2 calculation by computing the vector

$$z = \mathbf{M}^{-1} \Delta$$

in Eq. 2, effectively trading the cost of a matrix inversion for the requirement of re-calculating z for every different sky map Δ . If the the matrix $\mathbf{M}$ is dominated by the diagonal elements (or is pre-conditioned to be suitably close to the identity matrix) an iterative solution for z can be found in $O(N_d^2)$ operations (Press et al. 1992 and references therein; Oh, Spergel, & Hinshaw 1999). The determinant calculation, however, is less tractable. A number of authors have suggested ways around this problem. Karhunen-Loève eigenvalue techniques produce moderate data compression, reducing the N_d original data points to $N' \approx N_d/10$ eigenmodes (Bond 1994; Bunn & Sugiyama 1995; Tegmark et al. 1997). However, estimating cosmological parameters from the smaller set of eigenmodes still scales as $(N')^3$ operations, making such techniques undesirable for mega-pixel data sets.

Oh et al. (1999) derive a method for likelihood evaluation using a Newton-Raphson quadratic iteration scheme. The determinant is first approximated using azimuthal symmetry of the noise matrix (appropriate for full-sky CMB maps), then corrected using Monte Carlo simulations. The method provides a nearly minimum-variance estimate of the angular power spectrum for CMB anisotropy maps in $O(N_d^2)$ operations and $O(N_d^{3/2})$ storage; cosmological parameters can then be derived by comparing the power spectrum to various models. Although this algorithm is fast enough for mega-pixel data sets, it is optimized to estimate the power spectrum, rather than the underlying cosmological parameters. When used as a root-finding technique in parameter space, it requires a sufficiently good starting estimate to guarantee convergence to true maximum. The radius of convergence in parameter space is small and the problems associated with parameter covariance become severe.

Borrill (1998) offers a global solution to bound the likelihood. This method uses Gaussian quadrature to bound the likelihood at *any* point in parameter space (not just near the likelihood maximum); it is thus well suited to search parameter space using the direct pixel basis. However, the method requires $O(N_d^{7/3})$ operations for each likelihood evaluation and is thus significantly slower than the method of Oh et al. (1999). More importantly, it can only provide bounds on the likelihood, fixing $\log(\mathcal{L})$ to accuracy of a few percent. Since $\log(\mathcal{L}) > N_d$ (a large number), errors of a few percent can create significant bias in the location of the likelihood maximum.

This paper describes an algorithm to estimate cosmological parameters from mega-pixel data sets using maximum-likelihood techniques on pixelized sky maps. It uses a conjugate gradient algorithm to evaluate χ^2 and a geometric approximation to evaluate the determinant. Monte Carlo simulations provide a correction to the determinant, yielding an unbiased estimate of the likelihood surface in an arbitrary region surrounding the likelihood peak. The algorithm requires $O(N_d^{3/2})$ operations and $O(N_d)$ storage for each likelihood evaluation, and allows for significant parallel computation.

2 Likelihood Evaluation

Let the input data consist of a map of the microwave sky – a vector consisting of temperature differences Δ_i evaluated at N_d pixels on the sky. The temperature in each pixel consists of a cosmological signal plus instrument noise, $\Delta_i = s_i + n_i$, where we ignore for now the question of contaminating foreground signals (galactic and extragalactic emission). It is convenient to expand the CMB signal in spherical harmonics,

$$s(\Omega) = \sum_{\ell m} a_{\ell m} Y_{\ell m}(\Omega). \quad (5)$$

Inflationary models predict the $a_{\ell m}$ to be random Gaussian variables whose variance depends only on angular scale ℓ and not on m . The covariance matrix $\mathbf{M}_{ij}$ is thus

$$M_{ij} = \langle \Delta_i \Delta_j \rangle = \frac{1}{4\pi} \sum_{\ell} (2\ell + 1) W_{\ell}^2 C_{\ell} P_{\ell}(\hat{n}_i \cdot \hat{n}_j) + \frac{\sigma_0^2}{N_i^{\text{obs}}} \delta_{ij}, \quad (6)$$

where W_{ℓ}^2 is the experimental window function that includes the effects of beam smoothing and finite pixel size, $P_{\ell}(\hat{n}_i \cdot \hat{n}_j)$ is the Legendre polynomial of order ℓ , $\hat{n}_i$ is the unit vector towards the center of pixel i , N_i^{obs} is the number of observations for pixel i , and C_{ℓ} is the angular power spectrum

$$\langle a_{\ell m} a_{\ell' m'} \rangle = C_{\ell} \delta_{\ell \ell'} \delta_{m m'}.$$

We wish to evaluate the function

$$L = -\log(\mathcal{L}) \propto \chi^2 + \log(|\mathbf{M}|)$$

to derive the set of parameters $p = [\Omega, \Omega_b, H_0, \Lambda, \dots]$ which minimize L .

2.1 Chi-Squared Evaluation

Conjugate gradient techniques, to be efficient, require the matrix $\mathbf{M}$ to be suitably close to the identity matrix. For CMB maps, this is almost always the case. To see this, note that $\mathbf{M}_{ij} = \langle \Delta_i \Delta_j \rangle = C(\theta_{ij})$ where $C(\theta)$ is the two-point correlation function. Since $C(0) > C(\theta)$ for all $\theta > 0$, the matrix must satisfy

$$\mathbf{M}_{kk} > \mathbf{M}_{ik}, \quad i \neq k \quad (7)$$

A particularly simple iterative method for the χ^2 evaluation can be derived as follows. We define a residual vector

$$r = \mathbf{M}z - \Delta \quad (8)$$

which by definition is zero when z is solved exactly. Now suppose that we have a guess which differs from the exact solution by amount δz in the k^{th} element, with

corresponding residual vector $r_i = \delta z \mathbf{M}_{ik}$, that is, the scalar δz multiplied by the k^{th} row of the covariance matrix. But from Eq. 7 we may identify k as the position of the largest element of the vector r , and apply corrections

$$\begin{aligned} z_k &= z_k - \delta z \\ r_i &= r_i - \delta z \mathbf{M}_{ik} \end{aligned} \quad (9)$$

where

$$\delta z = \text{Max}(R) / \mathbf{M}_{kk} \quad (10)$$

For the general case where more than one element of z is incorrect, we may proceed iteratively, using Eqs. 10 and 9 until the largest element in the residual vector falls below some pre-determined threshold.

Figure 1 shows the convergence of χ^2 for a simulated sky map and vector z evaluated using the algorithm above for the case where $\mathbf{M}$ correctly describes the input map. The convergence is rapid. Each iteration requires $O(N_d)$ operations (the vector multiplication in Eq. 9) while the entire algorithm converges in $N_d \log(N_d)$ iterations.

2.2 Determinant Approximation

The determinant calculation in Eq. 1 scales as $O(N_d^3)$ operations, making direct evaluation prohibitively expensive. We make a first approximation to $|\mathbf{M}|$ by noting that the elements $\mathbf{M}_{ij}$ depend only on the angular separation between pixels i and j . For a rotationally invariant signal, rows $\mathbf{M}_{ik}$ and $\mathbf{M}_{jk}$ thus consist of the (nearly) the

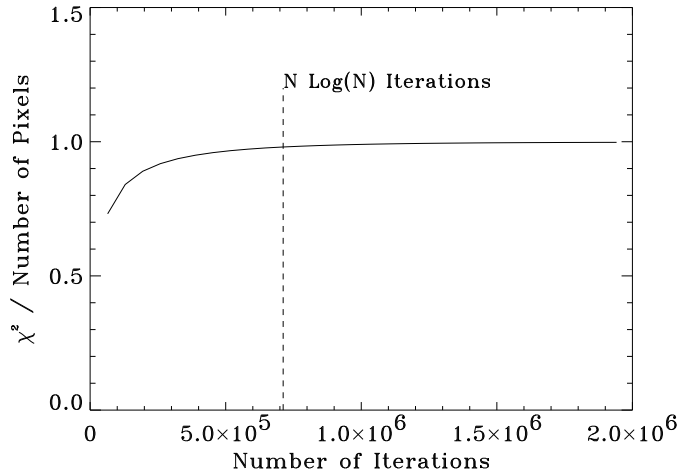


Figure 1: Convergence of χ^2 evaluated using the conjugate-gradient algorithm on a simulated CMB map with 64720 pixels.

same numbers, simply repeated in different order according to the pixelization. All of the information in the covariance matrix is contained in the two-point correlation function $C(\theta)$ – the covariance matrix merely samples $C(\theta)$ at a set of discrete values, then orders the values according to the pixel scheme. We thus make the *ansatz* that

$$\log(|\mathbf{M}|) = \alpha \log(|\mathbf{M}'|) \quad (11)$$

where the covariance matrix $\mathbf{M}'$ is formed from a subset of the pixels in the original sky map, chosen to sample the correlation function with the same angular distribution as the full set of pixels. If there are N' pixels in the subset, computing $|\mathbf{M}'|$ costs $(N')^3$ operations. We thus restrict ourselves to $N' \leq N_d^{2/3}$ so that the entire calculation scales as N_d^2 or faster.

The subset of N' pixels from the original sky map can be selected several ways. A random set of pixels will, on average, match the distribution of angular separations θ_{ij} in the original sky map. However, sample variance becomes important for small subsets and can over- or under-represent some separations in a single realization. While this would average out over many realizations, we are only allowed a single realization in the likelihood evaluation. We can overcome this by using subset pixels in a fixed geometric orientation. For full-sky maps, we obtain satisfactory results using a set of three interlocking great circles. Other configurations can be devised for different map geometries. Once the subset of N' pixels is selected, the determinant $|\mathbf{M}'|$ can be computed using standard techniques. For the great-circle geometry, the number of subset pixels scales as $N' \propto \sqrt{N_d}$. The determinant $|\mathbf{M}'|$ thus requires $O(N_d^{3/2})$ operations and $O(N_d)$ storage.

To derive the scale factor α , we again take advantage of the fact that for CMB maps the matrices $\mathbf{M}$ and $\mathbf{M}'$ are suitably close to diagonal. For diagonal matrices,

$$\alpha_0 = \frac{\sum_i \log(\mathbf{M}_{ii})}{\sum_i \log(\mathbf{M}'_{ii})}. \quad (12)$$

Off-diagonal elements produce corrections to this simple relation. For the CMB maps expected from the MAP and Planck surveys, however, Equation 12 is accurate to a few percent. We have tested this simple scaling for maps ranging from 384 to 6144 pixels, the largest value for which the full determinant can readily be evaluated. The simplistic approximation is accurate to a few percent over a wide range of parameter space and map size.

2.3 Monte Carlo Correction

Equations 11 and 12 allow efficient evaluation of the logarithmic likelihood

$$L = \chi^2 + \alpha |\mathbf{M}'| \quad (13)$$

at any point in parameter space to an accuracy of $\sim 2\%$ for computational cost $O(N_d^{3/2})$ and storage $O(N_d)$. It is thus well-suited for the initial stages of parameter estimation in the direct pixel basis. In this scheme, we begin with some initial choice of parameters and use the methods outlined above to evaluate the likelihood in the neighborhood of the initial parameters. Using established minimization search techniques (see, e.g., Press et al. 1992) we then step through parameter space toward the global likelihood maximum.

The simple approximation to L differs from the true value by a few percent in a smoothly-varying fashion. It thus returns a biased estimate of the global maximum, but does not create secondary (local) maxima. However, the initial stages of a parameter search overwhelmingly involve the rejection of *bad* solutions for the parameter values in favor of better ones; as such, we can afford to sacrifice some initial accuracy for computational speed. Once we have found the approximate location of the global maximum, we use Monte Carlo simulations to iterate toward an exact solution for the likelihood surface in a much smaller region of parameter space.

Monte Carlo techniques reverse the sense of the likelihood evaluation: instead of using Eqs. 12 and 13 to evaluate the likelihood for a map with unknown cosmological parameters, we use a set of simulated maps generated from a single fixed choice of parameter values and solve Eq. 13 for the unknown value α for which the likelihood correctly peaks at the known parameter values. That is, we generate a set of m simulated sky maps from a single set of parameter values p_0 . For each map,

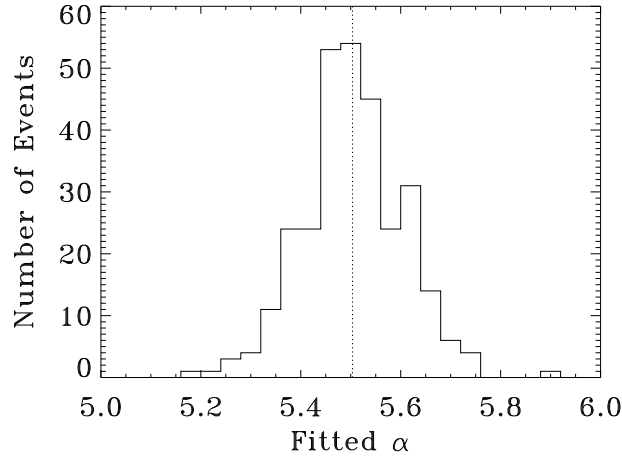


Figure 2: Histogram of the scale factor α derived from Eq. 13 using 300 Monte Carlo simulations. The dotted line indicates the value from direct evaluation of the determinants $|\mathbf{M}|$ and $|\mathbf{M}'|$. The simulations shown correspond to input parameters $\Omega = 0.7$, $n = 1.0$ and normalization $Q = 18 \mu\text{K}$, but the ability to recover the correct scaling α does not depend on the location in parameter space.

we evaluate χ^2 at a grid of parameter values centered on the input parameters (in practice, we find that varying a single parameter by a few percent provides acceptable results). We then use the χ^2 grid and determinants $|\mathbf{M}'|$ (which do not depend on the map values) to solve Eq. 13 for the scale factor α by requiring that $\log(\mathcal{L})$ peak at the input parameter value.

The scale factor α is a weak function of the parameter values. The fitted value α from each simulation is thus exact only at the parameter values p_0 , becoming increasingly poor at grid points further removed from p_0 . However, since the simulated maps correspond to the parameter choice p_0 , the likelihood function must peak exactly at p_0 and the process by construction is quadratically convergent.

We test the algorithm using simulated sky maps with 6144 pixels using different choices for sky cut, instrument noise, and subset pixel selection. We generate each simulated map using Eq. 5 with random variables $a_{\ell m}$ corresponding to a COBE-normalized cold dark matter model with $\ell < 100$ and 3° beam smoothing. To each sky we add instrument noise following either the DMR noise pattern (Bennett et al. 1996) or spatially uniform noise of the same mean amplitude. For each realization we compute the determinant $|\mathbf{M}'|$ and evaluate α using both the great circle and random pixel geometries on both the full sky map or the high-latitude portion $|b| > 20^\circ$.

Figure 2 shows a histogram of the recovered values from $m = 300$ Monte Carlo realizations for the full sky map with uniform noise and the great circle geometry. The recovered value, $\alpha = 5.504 \pm 0.006$, agrees well with the exact value (5.5036) derived by direct evaluation of the determinants $|\mathbf{M}|$ and $|\mathbf{M}'|$. Since the method involves no integrals over spatial functions it is completely insensitive to sky coverage. Allowing the noise to vary with position on the sky increased the scatter in the recovered values for α but did not bias the results: 300 simulations using COBE noise with $|b| > 20^\circ$ and random pixels obtained $\alpha = 7.07 \pm 0.04$ compared to the exact value 7.02 for 4016 high-latitude pixels. The convergence is rapid: One round of Monte Carlo realizations usually suffices to derive an accurate likelihood for a single point in parameter space.

3 Discussion

The determinant approximation requires $O(N_d^{3/2})$ operations and $O(N_d)$ storage for each point evaluated in parameter space. Conjugate gradient evaluation of χ^2 requires $O(m N_d^2)$ operations, where m is the number of Monte Carlo realizations. During the initial parameter search, Monte Carlo simulations are turned off and $m = 1$. Once an initial maximum is located, $m \approx 50$ realizations locate the true maximum to within 1% of the minimum variance limit. With efficient pre-conditioning (Oh et al. 1999), 100 χ^2 evaluations for a 10^6 pixel map can be run in 2 hours elapsed time. Since the determinant depends only on the model parameters and not on the map temperatures in each realization, it need be computed only once for each set of parameter values. Timing tests using a single CPU at 400 MHZ demonstrate that the

total elapsed time required to calculate $|\mathbf{M}'|$ scales as $N_d^{1.55}$ including all overhead. Computing the determinant for a map with $N_d = 10^6$ pixels requires 24 hours elapsed time on a single CPU. The entire computation thus has one term that scales as $\Delta t \sim 2$ hours $(N_d/10^6)^2$ and a second term scaling as $\Delta t \sim 24$ hours $(N_d/10^6)^{3/2}$. For $N_d < 10^8$ pixels, the determinant is the slower of the two and the entire computation scales as $N_d^{3/2}$.

The likelihood method described above has several advantages. By construction, the Monte Carlo simulations converge to the correct solution. Since the Monte Carlo algorithm evaluates the likelihood at parameter values close to the peak likelihood, it automatically provides the local curvature (Fisher information matrix) at no additional computational cost. The technique is well suited for the modest parallel processing provided by multiple-CPU work stations currently available. Finally, the technique does *not* depend on assumptions of any symmetry on the sky and can be used for any sky map regardless of the shape of the observed region. Asymmetric maps (e.g., a cut map that excludes bright regions/point sources or a partial map from balloon surveys) may be evaluated using the techniques outlined above.

Gary Hinshaw and David Spergel provided helpful comments. This work was funded in part by NASA grant S-57778-F.

References

- Bennett, C.L., et al. 1996, ApJL, 464, L1
- Bond, J.R. 1994, PRL, 72, 13
- Bond, J.R., Jaffe, A.H., and Knox, L. 1998, PRD, 57, 2117
- Borrill, J. 1998, Phys. Rev. (submitted); preprint astro-ph/9803114
- Bunn, E.F., and Sugiyama, N. 1995, ApJ, 446, 49
- Oh, S.P., Spergel, D.N., and Hinshaw, G. 1999, ApJ, 510, 551
- Press, W.H., Teukolsky, S.A., Vetterling, W.T., and Flannery, B.P. 1992, Numerical Recipes (Cambridge University Press: Cambridge)
- Tegmark, M., Taylor, A.N., and Heavens, A.F. 1997, ApJ, 480, 22
- Vogele, M.S., and Szalay, A.S. 1996, ApJ, 465, 34